





17" DRILL PRESS with SAFETY **GUARD & LIMIT SWITCH**



MILLING DRILLING MACHINE with SAFETY GUARD & LIMIT SWITCH



- 16 1/2" swing1 1/4" Drilling capacity Face mill capacity
- 5" stroke
- Spindle taper R8 12 speeds (150-2500 RPM)



POWERFEED **ATTACHMENT** PFM-32 For # PDM-30

\$599. MILLING

DRILLING MACHINE STAND

SS-45 Heavy-duty



torque motor with no pulleys or belts to cause vibration

Spindle taper MT #2

\$1999。



7" X 12" METAL CUTTING BANDSAW KC-712BC

KC-118FC-LS

• 12.5 Amp. motor

(240-3400 RPM) 17" swing

• 16 speeds

• 3 1/4" stroke

5/8" chuck

• 11.5 Amp. motor • Coolant system

DRILL PRESS CHUCK SAFETY

KC-118FC

• 17" swing

• 5/8" chuck

• 3 1/4" stroke


GUARD KM-118 \$19.99 Fits KC-118FC, KC-118FC-(LS)

• 12.5 Amp. motor

240-3400 RPM)

· Adjustable ball bearing guides





KING.

KC-3124V2

150 PSI max pressure



8000	H.S.S. & BI	-MET	AL B	LADES ("	SKII	P TOO	ΓH″)
67 ST. THE	Model	Length	Width	Blade Material	TPI	Thickness	Price
	KBB-712-10	93"	3/4"	H.S.S.	10	.032"	\$19.99
100	KBB-712-14	93"	3/4"	H.S.S.	14	.032"	\$19.99
NUMBER OF	KBB-712-18	93"	3/4"	H.S.S.	18	.032"	\$19.99
E0420	KBB-712-BM-610	93"	3/4"	Bi-Metal	6-10	.032"	\$64.99

KBB-712-BM-1014 93" 3/4" Bi-Metal 10-14 .032" \$64.99 HYBRID POLYMER INDUSTRIAL AIR HOSES ARCING FLEX.









16" X 20" COMBO LATHE/MILL KC-1620CLM

• Two powerful 3/4 HP 110V motors

• Lathe chuck and drill chuck safety guards with limit switch protection and

standard tool post safety guard

Comes with 5"- 3 jaw chuck, imperial & metric change gears, quick change tool post with 1/2" capacity, steady rest, follow rest, thread chasing dial indicator, MT#3 & MT#4 dead centres, 1/2" drill chuck and tool box with adjusting tools



STAND SS-1620CLM (41-3/8" x 19-1/4" x 30-1/2") \$299.





AIR COMPRESSORS & ACCESSORIES

5.5 PEAK HP 20 GALLON AIR COMPRESSOR

KC-2051H2

- 150 PSI max pressure
- 7.6 SCFM @ 40 PSI • 6.0 SCFM @ 90 PSI



10 GALLON 6.5 HP GAS WHEELBARROW AIR COMPRESSOR

KC-6510G1

- 150 PSI max pressure
 14.1 SCFM @ 40 PSI
- 11.2 SCFM @ 100 PSI
- High efficiency reed valves for maximum performance





HIGH OUTPUT 7.5 PEAK HP 80 GALLON AIR COMPRESSOR

KC-7180V1-MS

- High output 30 CFM @ 100 PSI
- 150 PSI max pressure
- 43 SCFM @ 40 PSI
- 30 SCFM @ 100 PSI

2 cylinder cast iron single stage oil lubricated pump



SPRAY GUN KITS









71 PC. AIR TOOL KIT



Comes with 1/2"Impact, Wrench, 3/8" Ratchet Wrench, Air Hammer and 1/4" Die Grinder

TIRE INFLATION **GUN WITH PRESSURE** GAUGE K-1630 \$19.99



(850ml)

WET-DRY VACUUMS

Double filtration system



Convenient 12 ft. power cord Comes complete with 6 ft. x 1-1/4" hose, 2 pc. plastic extension wand, 301 dust bag, cartridge filter, foam filter, reusable filter, 10" floor sweep and crevice tool

8 GALLON US

8540LST

12 ft. power cord

Comes complete with 6 ft. x 1-1/4" hose, 2 pc. extension wand, 40L dust bag, cartridge filter, foam filter, reusable filter, 10" floor sweep and crevice tool





10 40 LITERS GALLON US

8560LST

18 ft. power cord
 Comes complete

Comes complete with 8 ft. x 2-1/2" flex hose, 2 pc. 2-1/2" extension wand, contoured handle with air control, cartridge filter, foam filter, 14" floor sweep with squeegee insert, gulper tool, crevice tool and hanging accessory storage bag





6.5 PEAK 1660 LITERS HP 16 GALLON US

HEPA CARTRIDGE FILTER



PREMIUM HYBRID POLYMER **GARDEN HOSES**

K-5058GH $5/8" \times 50 \text{ ft.}$

K-10058GH $5/8" \times 100 \text{ ft.}$



150 PSI (Working) / 450 PSI (Bursi) **Extreme All-Weather Flexibility Kink resistant**



MAGNETIC SWITCH

es with twist Comes with padlock and 2 spare keys

KMAG-110-811 110V (8-11 Amp.) KMAG-110-1114 110V (11-14 Amp.) KMAG-110-1417 110V (14-17 Amp.) KMAG-220-811 220V (8-11 Amp.) KMAG-220-1114 220V (11-14 Amp.) KMAG-220-1417 220V (14-17 Amp.) KMAG-220-1721 220V (17-21 Amp.)

FIREPROOF 3"METAL DUST COLLECTION HOSES KIT RATED 130°C

DIGITAL FRACTIONAL CALIPER

· Converts to inches (decimal and fractional) and metric readings

KM-102 Kits Includes: 2 - 8ft (2.5M) 130°) Fireproof hoses 4 - Wire hose clamps (3")

KM-106

 Waterproof to IP54 standards • Two 3V Lithium batteries included





METAL DUST COLLEGIOR

KC-7300C

- Powerful 2 HP, 220V motor
- 2 Step activation safety switch with line voltage interruption in case of power failure
- Ideal for collection of metal chips and abrasive dust produced by metal sanders, grinders, cold cut saws, deburring and chamfering machines
- Large metal chips colection drawer is easy to access and clean
- 6" inlet with Y-inlet adaptor with two 3" dust inlets allowing up to connect up to two metalworking machines
- Comes with large paper filter and iron activated carbon filter





\$129.99

BENCH GRINDER STAND

SS-150

• Made of cast iron with coolant reservoir

• 32 3/4" high



12" HEAVY-DUTY BENCH GRINDER WITH FLOOR STAND

• 1720 RPM

NTEREUPTION



1.5 HP **Direct Drive** Motor (220V)

\$1299.







KC-1220

- Max. length 12"
- Maximum thickness
- 20 Gauge Weight 95 lbs
- **45**%.

KC-3020

- Max. length 30"
- Maximum thickness
- 20 Gauge
 Weight 300 lbs



KC-4020

- Max. length 40"
- Maximum thickness
- 20 Gauge
 Weight 387 lbs





- Level arm with
- compensating spring
 Easy cutting across the entire length
 • Rigid cutter body




4 TON HAND NOTCHER

KC-N616

- Heavy cast-iron
- construction 16 Gauge notching capacity (mild steel)18 Gauge piercing
- capacity (mild steel)
- Maximum notch (6" X 6" x 90°)
 Weight 165 lbs





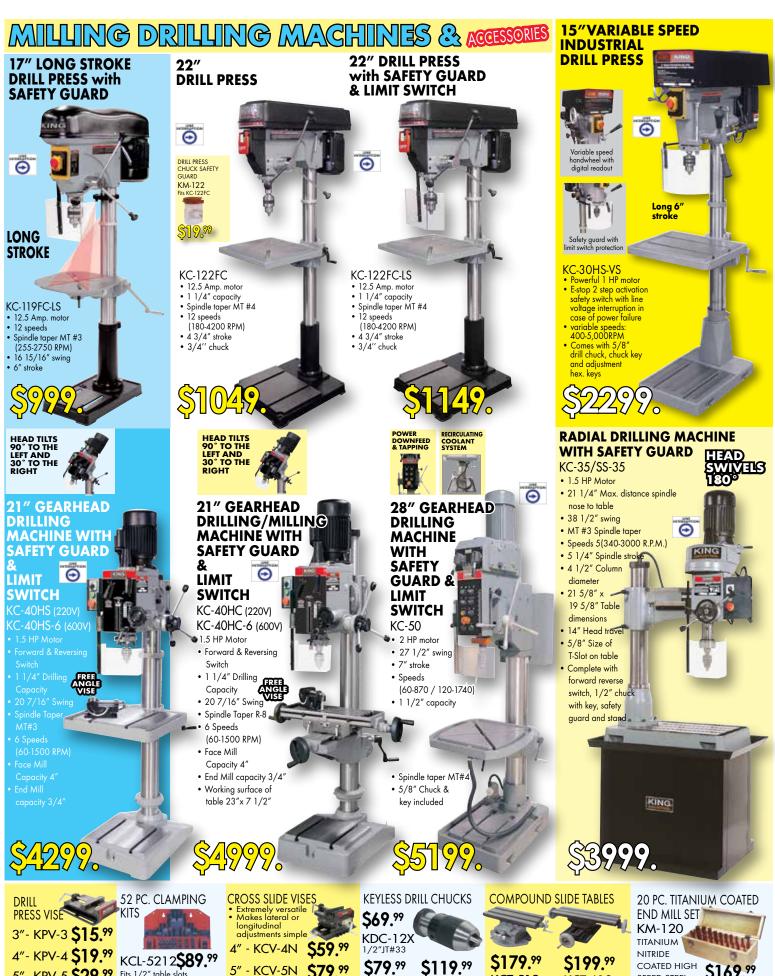



6"- KPV-6 \$39.99 KCL-52 \$89.99 Fits 5/8" table slots

6" - KCV-6N \$99.99

KDC-58X KDC-34X 5/8"-JT#3 3/4"-JT#4

KCT-512 KCT-618 5 1/2" X 12" 1/2" T- slots 6" X 18 1/2 1/2" T- slots

COATED HIGH \$169.99

2 & 4 Flute (10pcs. each) Imperial, Single End





MITAL LATHES & ACCESSORIES

7" X 12" VARIABLE SPEED MINI METAL LATHE

KC-0712ML

• 3/4" spindle bore

Variable speeds 2 (0-1100, 0-2500 RPM)

 Comes complete with quick change gear box, face plate, steady rest, replacement gears, 4-way tool post, MT#2 dead center, threading dial indicator, 4"- 3 jaw chuck, emergency stop button, chuck key and hex. keys



10" X 22" BELT DRIVE METAL LATHE

KC-1022ML

- 1" spindle bore
- Spindle speeds 6 (150-2400) RPM
- Comes complete with 5"-3 jaw chuck, 6-1/2"-4 jaw chuck, replacement gears, 4 way tool post, steady rest, follow rest, 8" face plate, thread chasing dial indicator, MT#3 dead center, full length splash guard, tool box, chuck key and hex. keys





Θ

12" X 36" GEARHEAD METAL LATHE

- 1 1/2" spindle bore
- Spindle speeds 9 (60-1500) RPM
- 40(4-112 T.P.I) 30(.2 4.5mm) thread cutting
- Comes complete with 6"-3 jaw chuck, 8"-4 jaw chuck, imperial and metric gears, quick change tool post, steady rest, follow rest, 10" DI-4 camlock face plate, thread chasing dial indicator, MT#3 dead center, MT#3 arbor taper, 1/2" drill chuck, full length splash guard, tool box, chuck keys and hex. keys

KC-1236ML/SS-1236





WITH TAPER ATTACHMENT KC-1236ML/KM-053/SS-1236

BONUS

ABINET STAND INCLUDED

14" X 40" GEARHEAD METAL LATHE

- Spindle speeds 8(70-2000 RPM)
- 34(4-56 T.P.I) 26(.4 7mm) thread cutting
- Comes complete with 6"-3 jaw chuck, 8"-4 jaw chuck, replacement gears, quick change tool post, steady rest, follow rest, 12" DI-4 camlock face plate, coolant system, full length splash guard, thread chasing dial indicator, 2 MT#3 dead centers, JT#5-MT#3 sleeve, chip tray, tool box, halogen lamp, chuck keys, hex. keys, and cabinet stand with foot brake

KC-1440ML-2 (2000

(240V

KC-1440ML-2/KM-054

399.

CABINET STAND WITH

16" X 40" HIGH PRECISION "TOOL ROOM" METAL LATHE

- Spindle speeds 16(45-1800 RPM)
- 2" spindle bore diameter
- 45(2-72 T.P.I) thread cutting

• Comes complete with 8"-3 jaw chuck with inside & outside jaws, 12"-4 jaw chuck, quick change tool post and two 3/4" tool holders, steady and follow rests with roller guides, 14" (D1-6) camlock face plate, MT #4 standard dead centre, MT #4 carbide tipped dead centre, MT #4 to MT #6 spindle sleeve adapter, halogen light, coolant system, full length splash guard, manual micrometer carriage stop, tool box and wrenches

KC-1640ML

12999.



KC-1640ML/KM-055





2" Spindle Bore





7 PC. CARBIDE **CUTTER HOLDER SETS**

• 1/4" Carbide Steel 2 position Cutter Tips (5pcs.)

• Carbide Steel Inserts (2pcs.)



KM-047

KM-057

Fits Models: KC-0712ML, KC-1022ML KC-1236ML, 14440ML-6

Fits Models KC-1640GH, KC-1640ML KC-1660GH

LIVE CENTERS



Accurate

Very

TAPER ATTACHMENT



KC-1236ML, KC-1440ML-6 & KC-1640ML

7PG QUICK CHANGE OL POST KITS



KQCT-0012 Fits most lathes up to 0 to 12" swing KQCT-1015

Fits most lathes between 10" to 15" swing

KQCT-1318 Fits most lathes between 13" to 18" swing

FAGOR DIGITAL READOUT SYSTEM



20i-T-840

20i-T-1040



2/AXIS with



METAL CUTTING BANDSAWS

5" x 6" METAL CUTTING **BANDSAW**

KC-129C

- 3 speeds (80-120-200 FPM)
- Comes with wheels for portability







.025

5" x 6" DUAL SWIVEL METAL **CUTTING BANDSAW** KC-129DS • Head swivels 0° - 45° to the right and 0° - 60°

to the left

- Adjustable hydraulic downfeed control
- Automatic shut-off switch
- · Adjustable ball bearing guides
- Portable design for easy movement









10" x 18" METAL CUTTING BANDSAW

Bi-Meta

KC-227-2 (220V) KC-227-6 (600V)

8

- 4 speeds (114, 196, 288, 377 FPM)
 Carbide ball bearing blade guide
 Centralized control panel and automatic shut-off

KBB-115-BM-10

KBB-115-BM-14 KBB-115-BM-18

- Adjustable hydraulic downfeed control
 To ensure reliable accurate cuts, both adjustable control arms can be positioned as close to the cut as possible
- Coolant system with regulator valves provide an even flow of coolant to the blade

Model	Length	Width	TPI	Thickness	Price
KBB-225-10	122"	1"	10	.032"	\$34.99
KBB-225-14	122"	1"	14	.032"	\$34.99





10" x 18" VARIABLE SPEED SWIVEL

METAL CUTTING BANDSAW KC-228S-V-2 (220V)

- KC-228S-V-6 (600V) Variable Speeds (73-312 FPM)
- Carbide ball bearing blade guides
- Adjustable hydraulic downfeed control Swivel base from 0° to 45°
- Coolant system with regulator valves provide an even flow of coolant to the blade

PATENTED TRU-LOCK quick locking vise system. Fully adjustable jaws for 0° to 45°

H.S.S. BLADES KBB-225-BM-610 122 KBB-225-BM-812 12





METAL CUTTING BANDSAWS

PATENTED GEAR DRIVE SYSTEM...

market which allows the user to change

is the ONLY one in the Canadian

7" x 12" METAL CUTTING BANDSAW WITH GEAR DRIVE

KC-712GH-5

- Returning coolant system3(110-230-340 FPM)
- Automatic shut-off
- Adjustable ball bearing guides



9"x 18" METAL CUTTING **SWIVEL BANDSAW**

KC-918S-V

Model KBB-918-10

KBB-918-14

131 3/4"

KBB-918-BM-610 131 3/4" 1 KBB-918-BM-812 131 3/4" 1

- Speeds (80-250 FPM)
- Carbide ball bearing blade guides with rollers
- Centralized control panel and automatic shut-off
- Adjustable hydraulic downfeed control
- Precision blade tension adjustment
- Head swivels 0° to 45° in one direction



\$34.99

\$34.99

\$99,99

\$99.99

| Length | Width | Blade Material | TPI | Thickness | Price | 131 3/4" | 1" | H.S.S. | 10 | .032" | \$34.9

Ri-Meta

Bi-Metal

$7'' \times 12''$ DUAL SWIVEL METAL CUTTING BANDSAW

KC-712DS

- Returning coolant system4 speeds (98-164-246-328 FPM)
- Automatic shut-off
- Adjustable ball bearing guides



17" VARIABLE SPEED METAL/WOOD CUTTING BANDŚAW

KC-1700WM-VS

- Variable speeds (wood): 540-3600 SFPM
- Variable speeds (metal): 100-650 SFPM
- Voltage (input power): 220V, 1 phase, 60 Hz
- Comes with a 1/2" x 6 TPI wood cutting blade, 1/2" x 10 TPI metal cutting blade, laser guide, work lamp, miter gauge and a precision "TRU-RIP" aluminum rip fence with resaw guide

18" METAL CUTTING **BANDSAW** KC-450

6/Amps (220V)

- Variable speed
- Handwheel controls speed
- Speed changes while the machine is in operation
- Comes complete with 4-way tilting table, and work light







voltage-sentitive electronics

• Powerful 3 HP, 4 stroke air cooled OHV engine DC output for charging smartphones, tablettes or any USB powered equipment

 DC Cigarette Lighter Socket: 12V/8 Amp DC output

 AC Duplex Outlet: 120V/13.3 Amp AC output



Parallel Cable Kit between two inverters



4000W GASOLINE DIGITAL INVERTER GENERATOR

KCG-4000i

- Sine wave digital inverter generator provides stable current to power voltage-sensitive electronics
- DC USB port: 5V/2.1 Amp.
 DC cigarette lighter socket: 12V/8 Amp. DC output

AC duplex outlet: 120V/20 Amp. AC output





PORTABLE & GASOLINE GENERATIORS & ACCESSORIES

950W PORTABLE GENERATOR

KCG-951G

- Powerful 2 HP, 2 stroke air cooled motor
- Brushless alternator and electronic ignition
- Outlet: 120V/6.7 Amp. AC output
- Outlet: 12V/5.3 Amp. DC output AC and DC circuit breakers and reset buttons for safe operation
 Comes with DC cables and spark plug socket
- CSA & EPA approved

1800W GASOLINE GENERATOR

KCG-1501GX

- Powerful 3 HP, 4 stroke air cooled OHV engine
- Electronic ignition
- Low oil shut-off with indicator light protects the engine
- Duplex Outlet: 120V/11.6 Amp. AC output
- Terminals: 12V, 8 Amp. DC output
- AC and DC circuit breakers for safe operation
 Comes with DC cables and spark plug socket
- Easy start recoil starter
 CSA & EPA approved





5100W GASOLINE GENERATOR WITH WHEEL KIT

KCG-5100G

- Powerful 8 HP, 4 stroke air cooled OHV engine
- AVR system and electronic ignition
- Low oil shut-off with indicator light protects the engine
- Duplex outlet: 120V/20 Amp. AC Twist lock outlet: 120V/240V/30 Amp. AC
- AC double throw circuit breaker and resets for safe operation
- Easy start recoil starter
- Voltage switch and ground terminal
 Wheel kit includes 8" wheels and pivot handle
- CSA & EPA approved

6500W GASOLINE GENERATOR WITH ELECTRIC START & WHEEL KIT

KCG-6502GE

- Powerful 10 HP. 4 stroke air cooled motor
- AVR system and electronic ignition
- Low oil shut-off with indicator light protects the engine
- Duplex outlet: 120V/20 Amp. AC
 Twist lock outlet: 120V/240V/30 Amp. AC
 AC double throw circuit breaker and resets
- for safe operation
- CSA & EPA approved





8500W GASOLINE GENERATOR WITH ELECTRIC START & WHEEL KIT

KCG-8500GE

- Powerful 15 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
- Low oil shut-off with indicator light protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Two twist lock outlets: 120V/30 Amp. and 120V/240V/30 Amp. AC
- Keyed electric start and easy start recoil starter AC double throw circuit breaker and resets
- for safe operation

CSA & EPA approved





12000W GASOLINE GENERATOR WITH ELECTRIC START & WHEEL KIT

KCG-12000GE

- Powerful 18 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
- · Low oil shut-off with indicator light protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Twist lock outlet: 120V/30 Amp. AC
- Outlet: 120V/240V/50 Amp. AC
- Keyed electric start and easy start recoil starter
 AC double throw circuit breaker and resets
- CSA & EPA approved



GASOLINE WATER PUMPS

head lift (total height at sea level, to which wate can be raised above original water level)

\$299,99

KCG-65

Powerful 6.5 HP

KCG-130 Powerful 13 HP 4 stroke air cooled OHV engines

4 stroke air cooled OHV engines

GASOLINE ENGINES

· Ideal for compressors, generators, pressure washers, go-karts and log splitters · Counterclockwise drive shaft direction

Powerful 7 HP, 4 stroke gir cooled NPT inlet



Comes with 3 wire clamps, 2 hose adapters, 2 rubber gaskets, strainer basket and straine basket adapter

Powerful 7 HP, 4 stroke gir cooled

€W NPT inlet



Standard





accessories 🔻

KCG-3WPG \$349,99



14 CUT OFF SAW

• Large trigger switch in handle for safe and easy use

· Quick release vise for holding workpiece

which allows cuts up to a 45° angle

INFRARED DIGITAL THERMOMETER WITH

• Standard 14" abrasive wheel for cutting ferrous metal

PORTABLE VARIABLE SPEED

(15 Amp. Motor)

WATER PUMP HOSE KITS

Each hose kit comes with a type A threaded camlock adaptor

CLEAR PVC REINFORCED SUCTION HOSES

FLAT PVC DISCHARGE HOSES



KW-252 KW-253 2" X 25 ft

KW-503 KW-502 3" X 50 ft 2" X 50 ft

LASER POINTER

Optional

Miter Stand turns this Bandsaw into a Cut-off Saw

SS-8377





	Н	.s.s.	BLA	DES	5	
П	Model	Length	Width	TPI	Thickness	Price
	KBB-8376-BM-1014	44 7/8"	1/2"	10-14	.020"	\$19.99
4	KBB-8376-BM-1418	447/8"	1"	14-18	.020"	\$19.99

15,000W V-TWIN **GASOLINE GENERATOR** WITH ELECTRIC START

KCG-15000GE

- · AVR system and electronic ignition
- Two duplex outlets: 120V/20 Amp. AC Twist lock outlet: 120V/30 Amp. AC
- Outlet: 120V/240V/50 Amp. AC
- AC double throw circuit breaker and resets
 Terminals: 12V/8.3 Amp. DC with DC reset
- CSA & EPA approved

Powerful 20 HP, V-Twin horizontal shaft 4 stroke air cooled OHV engine

AUTO-IDLE DOWN FUNCTION



3000 PSI GASOLINE **HIGH PRESSURE** WASHER

KPW-3001FM

- 3000 PSI, 2.3 GPM maximum water flow Thermal relief valve on pump to
- protect against overheating
 25' high pressure hose and inlet
- hose quick connect coupling

• Comes with 10" pneumatic wheels for portability and









5500 LBS

CAPACITY

