RE-TOOL YOUR METAL SHOP Fall & Winter 2020

The Most Importifye Dall Presses VIR







PDM-30

- 16 1/2" swing
 1 1/4" Drilling capacity
 3" Face mill capacity
 5" stroke

- Spindle taper R8 12 speeds (150-2500 RPM)

TABLE POWERFEED **ATTACHMENT**

PFM-32



SS-45 Heavy-duty **\$279.**

(D) / E-

S PACKAGE FREE ED WITH THE PURCHASE OF A les: angle drill press vise uck with key, drill chuck

16" X 20"



Θ

GUARD

KM-118

Fits KC-118FC

KC-118FC-ILSI

\$19.⁹⁹

DRILL PRESS CHUCK SAFETY

KC-118FC

• 12.5 Amp. motor • 16 speeds 240-3400 RPM) • 17" swing

17" DRILL PRESS 17" DRILL PRESS with SAFETY GUARD & LIMIT SWITCH

KC-118FC-LS

- 12.5 Amp. motor16 speeds 240-3400 RPM)
- 17" swing 3 1/4" stroke

16" NOVA VIKING 18" NOVA VOYAGER **DVR DRILL PRESS DVR DRILL PRESS**

Software

BY: KING INDUSTRIAL

83705

WEIN

Θ

DVR with

Adaptive Control™

Software

BY: KING INDUSTRIAL

- Powerful direct drive 1 HP high torque motor with no pulleys or torque motor with no pubelts to cause vibration
- Spindle taper MT #2 Comes with 5/8" drill cho
 & key, firmware USB cab
- knock-out wedge,ad wrench and hex. ke

58006

- Powerful direct drive 1.75 HP high torque motor with no pulleys or belts to cause vibration
- Spindle taper MT #2
- Comes with 5/8" drill a & key, firmware USB cable, knock-out wedge,adju wrench and hex. keys



KM-124 **Elevating block**



• Two powerful 3/4 HP 110V motors · Lathe chuck and drill chuck safety guards with limit switch protection

& metric change gears, quick change tool post with 1/2" capacity, steady rest, follow rest, thread chasing dial indicator, MT#3 & MT#4 dead centres, 1/2" drill chuck and tool box with



STATIONARY 2 cylinder cast iron 6.5 PEAK HP single stage oil lubricated pump **60 GALLON**

AIR COMPRESSOR

KC-6160V3

• 150 PSI max pressure

• 13.4 CFM @ 40 PSI 6.5 peak HP motor

Thermally protected

10" WET/DRY SHARPENER KIT KC-4900S

 Heavy-duty 1.6 Amp motor quietly rotates at 115 RPM for maximum precision during sharpening Comes with angle guide

honing compound and a square edge jig for sharpening a variety of blades and wood chisels



7" X 12" METAL CUTTING BANDSAW



KING







KING

METAL CUTTING BANDSAWS



KC-129C

• 3 speeds (80-120-200 FPM)

· Comes with wheels for portability





KING

5" x 6" DUAL SWIVEL METAL **CUTTING BANDSAW**

KC-129DS

• Head swivels 0° - 45° to the right and 0° - 60° to the left

Adjustable hydraulic downfeed control

Automatic shut-off switch

• Adjustable ball bearing guides

Portable design for easy movement









10" x 18" METAL CUTTING BANDSAW

KC-227-2 (220V)

KC-227-6 (600V) • 4 speeds (114, 196, 288, 377 FPM)

• Carbide ball bearing blade guide

• Centralized control panel and automatic shut-off

• Adjustable hydraulic downfeed control

• To ensure reliable accurate cuts, both adjustable control arms can be positioned as close to the cut as possible

Coolant system with regulator valves provide

an even flow of coolant to the blade

| Model | Length | Width | TPI | Thickness | Price | KBB-225-10 | 122" | 1" | 10 | .032" | \$34.95 | KBB-225-14 | 122" | 1" | 14 | .000" | 11.5 Amp @220V 2.6 Amp @ 600V





10" x 18" VARIABLE SPEED SWIVEL

METAL CUTTING BANDSAW

KC-228S-V-2 (220V) KC-228S-V-6 (600V)

Variable Speeds (73-312 FPM)

· Carbide ball bearing blade guides

• Adjustable hydraulic downfeed control

Swivel base from 0° to 45°

· Coolant system with regulator valves provide an even flow of coolant to









METAL CUTTING BANDSAWS



9"x 18" METAL CUTTING **SWIVEL BANDSAW**

KC-918S-V

- Speeds (80-250 FPM)
- Carbide ball bearing blade guides with rollers
- · Centralized control panel and automatic shut-off
- Adjustable hydraulic downfeed control
- Precision blade tension adjustment
- Head swivels 0° to 45° in one direction



7" x 12" DUAL SWIVEL METAL CUTTING BANDSAW KC-712DS

- · Returning coolant system
- 4 speeds (98-164-246-328 FPM)
- Automatic shut-off
- Adjustable ball bearing guides





17" VARIABLE SPEED METAL/WOOD CUTTING BANDSAW

KC-1700WM-VS

- Variable speeds (wood): 540-3600 SFPM
 Variable speeds (metal): 100-650 SFPM
 Voltage (input power): 220V, 1 phase, 60 Hz
 Comes with a 1/2" x 6 TPI wood cutting blade, 1/2" x 10 TPI metal cutting blade, laser guide, work lamp, miter gauge and a precision "TRU-RIP" aluminum rip fence with resaw guide

18" METAL CUTTING **BANDSAW**

KC-450

- Variable speed
- Handwheel controls speed
- Speed changes while the machine is in operation
- Comes complete with 4-way tilting table, and







KC-1220

- Max. length 12"
- Maximum thickness
- 20 Gauge Weight 95 lbs
- KC-3020
- Max. length 30" Maximum thickness
- 20 Gauge
- Weight 300 lbs



KC-4020

- Max. length 40"
- Maximum thickness
- 20 Gauge
- Weight 387 lbs








KC-RM22

- Cutting capacity (mild steel): 22 Gauge
- Distance between shaft centers: 2" • Depth of throat to frame: 7"
- Includes 6 dies for hooking (2),





Precision cut steel rams and pinions for accurate operation Capacity: 3 Ton Diameter of work: 12 1/2" Capacity over table: 12

12" HAND SHEAR

KC-HS12

- · Level arm with
- compensating spring
 Easy cutting across the



4 TON HAND NOTCHER

KC-N616

- Heavy cast-iron
- construction
- 16 Gauge notching capacity (mild steel)
- 18 Gauge piercing
- capacity (mild steel)
- Maximum notch (6" X 6" x 90°) Weight 165 lbs





DIGITAL FRACTIONAL CALIPER

KM-106

- Converts to inches (decimal and fractional) and metric readings
- Waterproof to IP54 standards
- Two 3V Lithium batteries included





MAGNETIC SWITCHES

Comes with twist

lock emergency

220V (17-21 Amp.)



2 HP METAL DUST COLLECTOR

KC-7300C

- Powerful 2 HP, 220V motor
- 2 Step activation safety switch with line voltage interruption in case of power failure
- Ideal for collection of metal chips and abrasive dust produced by metal sanders, grinders, cold cut saws, deburring and chamfering machines
- Large metal chips colection drawer is easy to access and clean
- 6" inlet with Y-inlet adaptor with two 3" dust inlets allowing up to connect up to two metalworking machines
- Comes with large paper filter and iron activated carbon filter





KMAG-220-1721





12" HEAVY-DUTY BENCH GRINDER WITH FLOOR STAND

KC-1295





COMPRESSORS & ACCESSORIES



3 cylinder cast iron

single stage oil





and 1/4" Die Grinder

AIR TOOL KIT 加많

11111

5.5 PEAK HP 24 GALLON AIR COMPRESSOR

KC-3124V2

8171

Wrench

Hamme

Comes with 1/2" Impact,

3/8" Ratchet Wrench, Air

- 150 PSI max pressure
- 7.6 CFM @ 40 PSI
- 6.0 CFM @ 90 PSI

2 cylinder cast iron single stage oil lubricated pump

COMPRESSOR

KC-5160V3

ASME safety

• 150 PSI max pressure

22 6 CFM @ 40 PSI

18.5 CFM @ 100 PSI

· High efficiency reed valves

5.5 PEAK HP 20 GALLON



HP 80 GALLON AIR

COMPRESSOR KC-7180V3-MS


200 PSI max pressure



2 cylinder cast iron

single stage oil lubricated pump



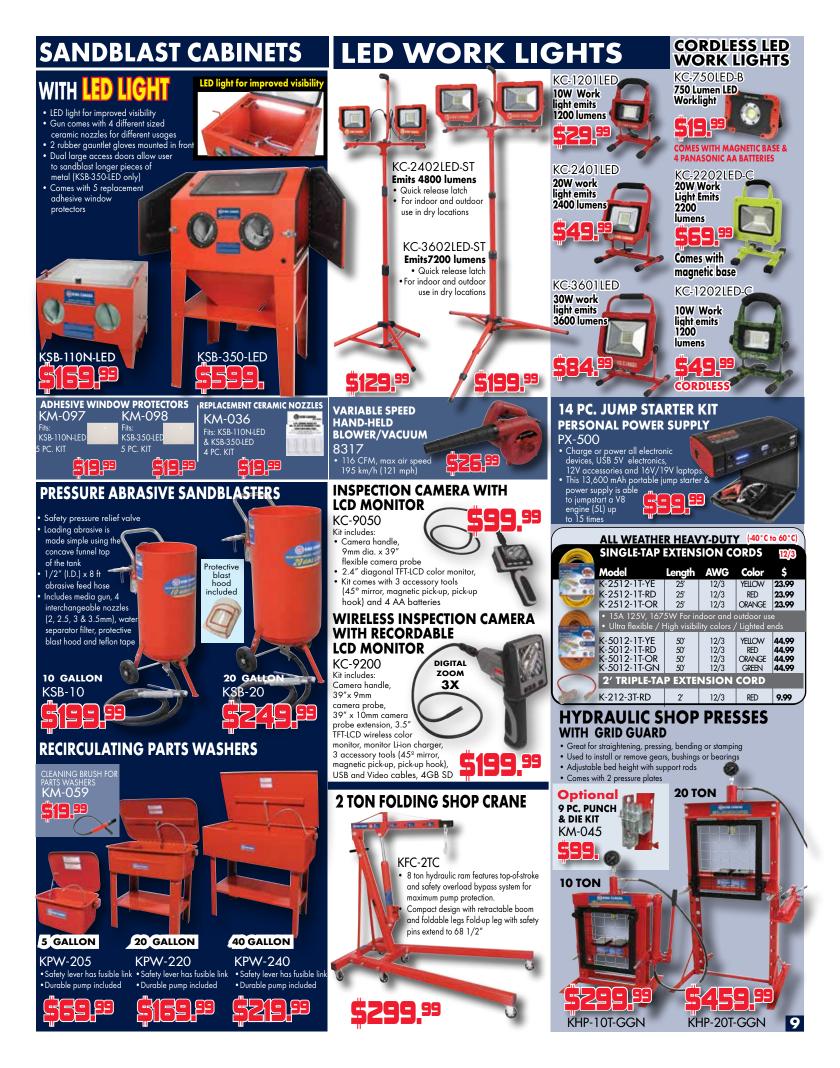



PORTABLE VARIABLE SPEED METAL CUTTING BANDSAW





GASOLINE ENGINES

- · Ideal for compressors, generators, pressure washers, go-karts and log splitters
- · Counterclockwise drive shaft direction




WATER PUMP HOSE KITS

Each hose kit comes with a type A threaded camlock adaptor CLEAR PVC REINFORCED FLAT PVC



KW-252 KW-253 KW-502 KW-503



15,000W V-TWIN **GASOLINE GENERATOR** WITH ELECTRIC START

KCG-15000GE

4 stroke air cooled

OHV engines

- AVR system and electronic ignition
- Two duplex outlets: 120V/20 Amp. AC
 Twist lock outlet: 120V/30 Amp. AC
 Outlet: 120V/240V/50 Amp. AC

- AC double throw circuit breaker and resets
- Terminals: 12V/8.3 Amp. DC with DC reset
- CSA & EPA approved

Powerful 20 HP, V-Twin horizontal shaft 4 stroke

AUTO-IDLE DOWN FUNCTION

3000 PSI GASOLINE HIGH PRESSURE WASHER

2" X 50 ft

3" X 50 ft

KPW-3001FM

3" X 25 ft

- 3000 PSI, 2.3 GPM maximum water flow
 Thermal relief valve on pump to protect against overheating
 25' high pressure hose and inlet
- hose quick connect coupling







PORTABLE & GASOLINE GENERATORS & ACCESSORIES 6500W GASOLINE GENERATOR WITH ELECTRIC START **5100W** GASOLINE GENERATOR WITH WHEEL KIT WITH ELECTRIC START

- KCG-5100G
 Powerful 8 HP, 4 stroke air cooled OHV engine
- AVR system and electronic ignition
 Low oil shut-off with indicator light protects the engine
- Duplex outlet: 120V/20 Amp. AC
 Twist lock outlet: 120V/240V/30 Amp. AC
- · AC double throw circuit breaker and reset
- CSA & EPA approved



KCG-6502GE
• Powerful 10 HP, 4 stroke air cooled motor

- AVR system and electronic ignition
 Low oil shut-off with indicator light protects the engine
- Duplex outlet: 120V/20 Amp. AC
 Twist lock outlet: 120V/240V/30 Amp. AC
- · AC double throw circuit breaker and



10000W GASOLINE GENERATOR

KCG-10001GE

- Powerful 15 HP, 4 stroke air cooled motor

- AVR system and electronic ignition
 Low oil shut-off with indicator light protects the engine
 Two duplex outlets: 120V/20 Amp. AC
 Two twist lock outlets: 120V/30 Amp and 120V/240V/30 Amp AC
- Keyed electric start and easy start recoil starter
 AC double throw circuit breaker and resets for safe operation
- CSA & EPA approved



2000W GASOLINE DIGITAL

INVERTER GENERATOR

Sine wave digital inverter generator provides stable current to power

voltage-sentitive electronics
Powerful 3 HP, 4 stroke air cooled

charging smartphones, tablettes or any USB powered equipment

OHV engine DC output for

DC Cigarette Lighter Socket: 12V/8 Amp DC output
 AC Duplex Outlet: 120V/

13.3 Amp AC output

1800W GASOLINE GENERATOR

KCG-1501GX

- Powerful 3 HP, 4 stroke air cooled OHV engine
- Electronic ignition
- Low oil shut-off with indicator light protects the engine
- Duplex Outlet: 120V/11.6 Amp. AC output Terminals: 12V, 8 Amp. DC output
- AC and DC circuit breakers for safe operation
- Comes with DC cables and spark plug socket
- · Easy start recoil starter
- CSÁ & EPA approved



12000W GASOLINE GENERATOR WITH ELECTRIC START

KCG-12000GE

- Powerful 18 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
- · Low oil shut-off with indicator light protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Twist lock outlet: 120V/30 Amp. AC
- Outlet: 120V/240V/50 Amp. AC
- Keyed electric start and easy start recoil starter
- · AC double throw circuit breaker and resets

WITH ELECTRIC START

KCG-12001GE-DF Powerful 18 HP 4 stroke air cooled motor • AVR system and electronic ignition

ഉപ്പെര K-X2P Parallel Cable

Kit for connectivity hetween two inverters

KCG-2001i





USB C

4000W GASOLINE DIGITAL INVERTER GENERATOR

KCG-4000i

Remote

Powerful 7.5 HP,

4 stroke air cooled **OHV** engine

control

start

- Sine wave digital inverter generator provides stable current to power voltage-sensitive electronics
- DC USB port: 5V/2.1 Amp.
- DC cigarette lighter socket: 12V/8 Amp. DC output
 AC duplex outlet: 120V/20 Amp. AC output
- · AC twist lock outlet: 120V/30 Amp. AC outpu



· Low oil shut-off with indicator light protects the engine • Two duplex outlets: 120V/20 Amp. AC • Twist lock outlet: 120V/30 Amp. AC

- Outlet: 120V/240V/50 Amp. AC
- Keyed electric start and easy start recoil starter
- · AC double throw circuit breaker and resets

Comes with propane tank connection cable



50 AMP. GENERATOR ADAPTOR CORD

K-1450P-2

Cord length: 1.5 feet Gauge (AWG)/Cord: 10 (SJTW 4/C)

Nema 14-50P 120/240V plug to Nema L14-30R 120/240V twist lock receptacle



GENERATOR EXTENSION CORDS

K-L1430-10

Extension cord length:

Gauge (AWG)/Cord: 12 (SJTW 4/C)

10 feet

K-L1430R-25

Extension cord length: 25 feet Gauge (AWG)/Cord: 10 (SJTW 4/C)



K-L1430-25-4T Extension cord length:

25 feet Gauge (AWG)/Cord: 10
(SJTW 4/C) Lighton K-L1430-25EXT Extension cord length
25 feet Gauge (AWG)/Cord: 10 (SJTW 4/C)

Converts a Nema L14-30P 240V 30 Amp Twist Lock plug

into Nema 5-15/20R 120V 20A receptacles







connector, 2 insulating gaskets and mounting hardware

METAL LATHES & ACCESSORIES



7" X 12" VARIABLE SPEED MINI METAL LATHE

KC-0712ML

- 3/4" spindle bore
- Variable speeds 2 (0-1100, 0-2500 RPM)
- · Comes complete with quick change gear box, face plate, steady rest, replacement gears, 4-way tool post, MT#2 dead center, threading dial indicator, 4"- 3 jaw chuck, emergency stop button, chuck key and hex. keys



10" X 22" BELT DRIVE METAL LATHE

KC-1022ML

- 1" spindle bore
- Spindle speeds 6 (150-2400) RPM
- Comes complete with 5"-3 jaw chuck, 6-1/2"-4 jaw chuck replacement gears, 4 way tool post, steady rest, follow rest, 8" face plate, thread chasing dial indicator, MT#3 dead center, full length splash guard, tool box, chuck key and hex. keys





Θ

Θ

12" X 36" GEARHEAD METAL LATHE

- 1 1/2" spindle bore
- Spindle speeds 9 (60-1500) RPM
- 40(4-112 T.P.I) 30(.2 4.5mm) thread cutting
- Comes complete with 6"-3 jaw chuck, 8"-4 jaw chuck, imperial and metric gears, quick change tool post, steady rest, follow rest, 10" DI-4 camlock face plate, thread chasing dial indicator, MT#3 dead center, MT#3 arbor taper, 1/2" drill chuck, full length splash guard, tool box, chuck keys and hex. keys

KC-1236ML/SS-1236



KC-1236ML/KM-053/SS-1236

BONUS

CABINET STAND INCLUDED

14" X 40" GEARHEAD METAL LATHE

- Spindle speeds 8(70-2000 RPM)
- 34(4-56 T.P.I) 26(.4 7mm) thread cutting
 Comes complete with 6"-3 jaw chuck, 8"-4 jaw chuck, replacement gears, quick change tool post, steady rest, follow rest, 12" DI-4 camlock face plate coolant system, full length splash guard, thread chasing dial indicator, 2 MT#3 dead centers, JT#5-MT#3 sleeve, chip tray, tool box, halogen lamp, chuck keys, hex, keys, and cabinet stand with foot brake

KC-1440ML-2

WITH TAPER ATTACHMENT

C-1440ML-2/KM-054

2 HP

16" X 40" HIGH PRECISION "TOOL ROOM" METAL LATHE

- Spindle speeds 16(45-1800 RPM)
- 2" spindle bore diameter
- 45(2-72 T.P.I) thread cutting

• Comes complete with 8"-3 jaw chuck with inside & outside jaws, 12"-4 jaw chuck, quick change tool post and two 3/4" tool holders, steady and follow rests with roller guides, 14" (D1-6) camlock face plate, MT #4 standard dead centre, MT #4 carbide tipped dead centre, MT #4 to MT #6 spindle sleeve adapter, halogen light, coolant system, full length splash guard, manual micrometer carriage stop, tool box and wrenches

KC-1640ML



WITH TAPER ATTACHMENT KC-1640ML/KM-055





CABINET STAND WITH FOOT BRAKE INCLUDED

(240V)

CABINET STAND WITH FOOT BRAKE INCLUDED



Contract |



KING

7 PC. CARBIDE CUTTER HOLDER SETS

- 1/4" Carbide Steel 2 position Cutter Tips (5pcs.)
- Carbide Steel Inserts (2pcs.)







3/8" Shank

Fits Models: KC-0712ML, KC-1022ML KC-1236ML, 14440ML-6

Fits Models

KC-1640GH, KC-1640ML

LIVE CENTERS



Very Accurate

KLC-3M TAPER SHANK - MT#3

TAPER ATTACHMENT



These Taper Attachments are designed to fit our 12" x 36" , 14" x 40" & 16" x 40" Metal Lathes models KC-1236ML, KC-1440ML-6 & KC-1640ML

7 PC. QUICK CHANGE TOOL POST KITS



KQCT-0012 Fits most lathes up to 0 to 12" swing

KQCT-1015 Fits most lathes between 10" to 15" swing

KQCT-1318 Fits most lathes between 13" to 18" swing

FAGOR DIGITAL READOUT SYSTEM



20i-T-840 (Fits KC-1440ML-6 & KC-1440ML-2) 2 AXIS with

20i-T-1040 (Fits KC-1640ML)

2 AXIS with 10" x 40" scales



