# 

PRICES IN EFFECT UNTIL DECEMBER 31<sup>ST</sup>, 2021









## MILLING DRILLING MACHINE with SAFETY GUARD & LIMIT SWITCH PDM-30 • 16 1/2" swing • 1 1/4" Drilling capacity

- 3" Face mill capacity
- Spindle taper R8
- 12 speeds (150-2500 RPM)

**OPTIONAL** TABLE POWERFEED ATTACHMENT

**PFM-32** For # PDM-30

5 PC. ACCESSORY ONUS PACKAGE FR INCLUDED WITH THE PURCHASE OF A PDM-30 MILLING DRILLING MACHINE

face mill arbor

MILLING DRILLING MACHINE STAND

SS-45 Heavy-duty steel construction



## 10" WET/DRY **SHARPENER KIT**

KC-4900S

 Heavy-duty 1.6 Amp, motor quietly rotates at 115 RPM for maximum precision during

sharpening
Comes with angle guide honing
compound and a square edge
jig for sharpening a variety of

OPTIONAL 4 pc. Accessory Kit KM-130

**(()** () ()

STATIONARY 6.5 PEAK HP **60 GALLON** 

16" NOVA VIKING

Powerful direct drive 1 HP high torque motor with no pulleys or belts to cause vibration

**DVR DRILL PRESS** 

 Spindle taper MT #2
 Comes with 5/8" drill a & key, firmware USB cable, knock-out wedge;adjustmen wrench and hex. keys

83705

6.5 peak HP motor with reset AIR COMPRESSOR

KC-6160V3

• 150 PSI max pressure

13 4 CFM @ 40 PSI

11.2 CFM @ 90 PSI

2 cylinder cast iron single stage oil lubricated pump

Thermally protected US Motor®



**5 PC. CUTTER HOLDER SETS** 

KM-046 3/8" Shank Fits: KC-0712ML,

16" X 20"

18" NOVA VOYAGER

Powerful direct drive 1.75 HP high torque motor with no pulleys or belts to cause vibration

**DVR DRILL PRESS** 

Spindle taper MT #2
Comes with 5/8" drill ah
& key, firmware USB cab
knock-out wedge,adjustin

knock-out wedge, as wrench and hex. ke

58006

OPTIONAL

Elevating block \$179 with 7/16" T-slots (7 Two powerful 3/4 HP 110V motors



• Lathe chuck and drill chuck safety guards with limit switch protection and standard tool post safety guard Comes with 5"- 3 jaw chuck, imperial & metric change gears, quick change tool post with 1/2" capacity, steady rest, follow rest, thread chasing dial indicator, MT#3 & MT#4 dead centres, 1/2" drill chuck and tool box with

> S-1620CLM 41-3/8" x 19-1/4"

\$449.

30-1/2")















KING

**OPTIONAL** 

MILLING

DRILLING MACHINE STAND

\$359.99

leavy-duty steel construction

SS-45





6"-

KMV-6M

\$199.

8"-

KMV-8M

\$299.

BASE MILLING

VISES

KC-HVRT-8

52/Amps (600**V**) KMV-3M KMV-4M

\$109. \$169.

TAILSTOCK FOR

Fits: KC-HVRT-6, \$139

ROTARY TABLE KC-TRT-6

12" COLD CUT SAW BLADE

KM-1200

(Made in Italy)

\$2999.

# KING

# METAL GUITING BANDSAWS





8 Amp. • 3 speeds (80-120-200 FPM) (110V) Comes with wheels for portability



H.S.S. & BI-METAL BLADES							
	odel	Length		Blade Material	TPI	Thickness	
K	BB-115-10	64 1/2"	1/2"	H.S.S.	10	.025"	\$15.99
My mountain K	BB-115-14	64 1/2"	1/2"	H.S.S.	14	.025"	\$15.99
( ) K	BB-115-18	64 1/2"	1/2"	H.S.S.	18	.025"	\$15.99
( 55 kg ) K	BB-115-24	64 1/2"	1/2"	H.S.S.	24	.025"	\$15.99
I KI	BB-115-BM-10	64 1/2"	1/2"	Bi-Metal	10	.025"	\$37.99
(" 1) K	BB-115-BM-14	64 1/2"	1/2"	Bi-Metal	14	.025"	\$37.99
K	BB-115-BM-18	64 1/2"	1/2"	Bi-Metal	18	.025"	\$37.99

5" x 6" **ADJUSTABLE DUAL SWIVEL METAL** HYDRAULIC **CUTTING CYLINDER BANDSAW** KC-129DS \$1049 8 Amp. (110V) Head swivels 0° - 45° to the right and  $0^{\circ}$  -  $60^{\circ}$ to the left Adjustable hydraulic KING downfeed control Automatic shut-off switch Adjustable ball bearing guides Portable design for easy movement

# 10" x 18"

#### **METAL CUTTING BANDSAW**

KBB-8376-BM-1014 44 7/8" 1/2" 10-14 .020" KBB-8376-BM-1418 44 7/8" 1" 14-18 .020"

BI-METAL BLADES

KC-227-2 (220V) KC-227-6 (600V)

Model

turns this

**Bandsaw** into

a Cut-off Saw

SS-8377

- 4 speeds (114, 196, 288, 377 FPM) Carbide ball bearing blade guide
- Centralized control panel and automatic shut-off
- Adjustable hydraulic downfeed control
- To ensure reliable accurate cuts, both adjustable control arms can be positioned as close to the cut as possible

\$99.99

Length Width TPI Thickness Price







H.S.S. BLADES					•	
odel	Length	Width	TPI	Thickness	Price	1
B-225-10	122"	1"	10	.032"	\$37.99	'
B-225-14	122"	1"	14	.032"	\$37.99	1

# 10" x 18"

## VARIABLE SPEED SWIVEL METAL **CUTTING BANDSAW**

KC-228S-V-2 (220V) KC-228S-V-6 (600V)


• Variable Speeds (73-312 FPM)

Carbide ball bearing blade guides

Adjustable hydraulic downfeed control
Swivel base from 0° to 45°

Coolant system with regulator valves provide an even flow of coolant

11.5 Amp. @ 220V 2.6 Amp. @ 600V







# METAL QUITING BANDSAWS



Length Width Blade Material TPI Thickness Price

Bi-Meta

10 .032

14

6-10

Model

KBB-918-10

KBB-918-14

KBB-918-BM-610 131 3/4"

KBB-918-BM-812 | 131 3/4" | 1<sup>n</sup>

131 3/4"

131 3/4" 1

## 7" x 12" DUAL SWIVEL METAL **CUTTING BANDSAW**

#### KC-712DS

- Returning coolant system4 speeds (98-164-246-328 FPM)
- Automatic shut-off



## 17" **VARIABLE SPEED METAL/WOOD CUTTING BANDSAW**

KC-1700WM-VS

- NC-17 UOW/N-V3

  Variable speeds (wood): 540-3600 SFPM

  Variable speeds (metal): 100-650 SFPM

  Voltage (input power): 220V, 1 phase, 60 Hz

  Comes with a 1/2" x 6 TPI wood cutting blade, 1/2" x 10 TPI metal cutting blade, laser guide, work lamp, miter gauge and a precision "TRU-RIP" aluminum rip fence with resaw guide



#### KC-450

- Variable speed
- Handwheel controls speed
- Speed changes while the machine is in operation
- Comes complete with 4-way tilting table, and work light





# METAL FORMING MAGHINES









#### **MACHINE** KC-RM22

Cutting capacity
(mild steel): 22 Gauge
Distance between shaft centers: 2"

- Depth of throat to frame: 7'
- Includes 6 dies for hooking (2), burring, wiring, ogee beads and crimping

#### **ARBOR PRESS**

#### KAP-3

- · Precision cut steel rams and pinions for accurate operation
- Capacity: 3 Ton
- Diameter of work: 12 1/2"
- Capacity over table: 12'

#### **12" HAND** SHEAR

#### KC-HS12

- Level arm with compensating spring
- Easy cutting across the entire length
- Rigid cutter body

\$275.

#### **4 TON HAND** NOTCHER

# KC-N616

- Heavy cast-iron construction
- 16 Gauge notching capacity (mild steel)
- 18 Gauge piercing
- capacity (mild steel)
- Maximum notch (6" X 6" x 90°)Weight 165 lbs

**\$749**.

# **SLIP ROLLS**

#### KC-S5016

- Max. length 50"Capacity 16 GaugeWeight 540 lbs

1899.

#### KC-S3622

- Max. length 36"
- Capacity 22 Gauge • Weight 176 lbs

\$899. KC-S2422 • Max. length 24' Capacity 22 GaugeWeight 81 lbs \$699.









#### AIR TOOL KIT 771 P.C. 8171 Comes with 1/2" Impact Wrench. 3/8" Ratchet 11111 Wrench, Air and 1/4" Die Grinder \$149.99

# COMPRESSOR OIL BOTTLE

KW-077 \$9.99 (850ml)

#### **HIGH OUTPUT 6.5 PEAK HP 60 GALLON AIR** COMPRESSOR

KC-5160V3

- 150 PSI max pressure
- 22.6 CFM @ 40 PSI
- 18.5 CFM @ 100 PSI
- lubricated pump

3 cylinder cast iron

single stage oil

KC-7180V3-MS lubricated pump • 200 PSI max pressure 43 CFM @ 40 PSI

• 28 CFM @ 175 PSI

NEW & IMPROVED

**TIRE INFLATION GUN** 

\$23.99

**HIGH OUTPUT 7.5 PEAK** 

COMPRESSOR 2 cylinder cast iron

**HP 80 GALLON AIR** 

WITH PRESSURE **GAUGE** 

K-1630

High Performance

single stage oil

Air Compressor with high output of 28 CFM @ 175 PSI



KC-3124V2

- 150 PSI max pressure 2 cylinder cast iron
- 7.6 CFM @ 40 PSI 6.0 CFM @ 90 PSI
- single stage oil lubricated pump

# **5.5 PEAK HP 20 GALLON** AIR COMPRESSOR

KC-2051H2

**\$69** 

- 150 PSI max pressure
- 7.6 CFM @ 40 PSI 6.0 CFM @ 90 PSI

MAXIMUM PRESSI

2 cylinder cast iron single stage oil lubricated pump

**\$95.** 











	INDUSTRIAL AIR HOSES					
	K-2514H	25'x1/4"	\$21.99			
	K-2538H	25'x3/8"	\$29.99			
	K-5014H	50'x1/4"	\$33.99			
1	K-5038H	50'x3/8"	\$44.99			
	K-10014H	100'x1/4"	\$54.99			
RE.	K-10038H	100'x3/8"	\$65.99			



\$109.99

K-5038FRL 50 ft. x 3/8"

All-Weather Flexibility (-40°C to 65°C)
 Comes with wall mounting hardware

MANUAL AIR HOSE REEL WITH HYBRID POLYMER AIR HOSE \$109.99 K-10014FRL

100 ft. x 1/4" All-Weather Flexibility (-40°C to 65°C)

• 360° swivel base



K-5058GH  $5/8" \times 50 \text{ ft.}$ 

5/8" x 100 ft.

\$45. 150 PSI (Working) / 450 PSI (Burst) Extreme All-Weather Flexibility Kink resistant

# **WET-DRY VACUUMS**

#### Double filtration system with pleated cartridge filter




# **CARTRIDGE**

HEPA (high-efficiency particulate air) filters are designed to capture all particles that are 0.3 microns or smaller.

**KVAC-1145** FITS: 8520LP, 8530LPN, 8531LP-B, 8540LST,

KVAC-1150 Fits: 8560LST



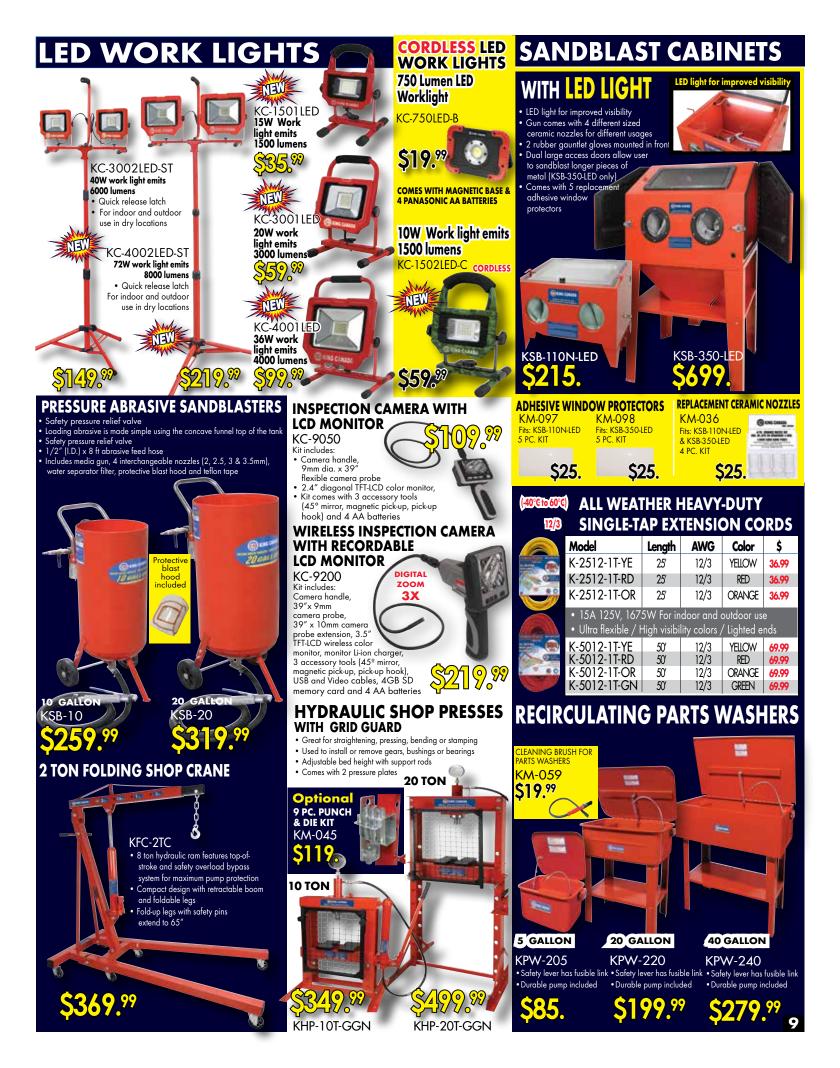

# **PORTABLE & GASOLINE GENERATORS & ACCESSORIES**

## **950W** PORTABLE GENERATOR

KCG-951G

- Powerful 2 HP, 2 stroke air cooled motor
- Brushless alternator and electronic ignition
  Outlet: 120V/6.7 Amp. AC output
- Outlet: 12V/5.3 Amp. DC output
- · AC and DC circuit breakers and reset buttons for safe operation
- Comes with DC cables and spark plug socket



- Powerful 3 HP, 4 stroke air cooled motor
- · Electronic ignition
- Low oil shut-off with indicator light protects the engine
- Duplex Outlet: 120V/11.6 Amp. AC output
- Terminals: 12V, 8 Amp. DC output
- AC and DC circuit breakers for safe operation.
- Comes with DC cables and spark plug socket
- · Easy start recoil starter



- KCG-5100G
   Powerful 8 HP, 4 stroke air cooled OHV engine
- AVR system and electronic ignition
- Low oil shut-off with indicator light protects the engine
- Duplex outlet: 120V/20 Amp. AC
  Twist lock outlet: 120V/240V/30 Amp. AC
- · AC double throw circuit breaker and resets
- CSA & EPA approved





• Powerful 10 HP, 4 stroke air cooled motor † AVR system and electronic ignition

- · Low oil shut-off with indicator light protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Twist lock outlet: 120V/240V/30 Amp. AC
- · Keyed electric start and easy start recoil starter
- · AC double throw circuit breaker and resets for safe operation



# **10000W** GASOLINE GENERATOR WITH ELECTRIC START

KCG-10001GE

- Powerful 15 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
  Low oil shut-off with indicator light protects the engine

- Two duplex outlets: 120V/20 Amp. AC
  Two twist lock outlets: 120V/30 Amp and 120V/240V/30 Amp
  Keyed electric start and easy start recoil starter
- AC double throw circuit breaker and resets for safe operation
- CSA & EPA approved



# 12000W GASOLINE GENERATOR WITH ELECTRIC START

KCG-12000GF

- Powerful 18 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
- Low oil shut-off with indicator light protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Twist lock outlet: 120V/240V/30 Amp. AC
- Outlet: 120V/240V/50 Amp. AC
- · Keyed electric start and easy start recoil starter
- · AC double throw circuit breaker and resets





# **GENERATOR EXTENSION CORDS**

Converts a Nema L14-30P 240V 30 Amp Twist Lock plug into Nema 5-15/20R 120V 20A receptacles



K-L1430-25-4 Gauge (AWG)/Cord: 10
(SJTW 4/C) Light

K-L1430R-25 Extension cord length 25 feet Gauge (AWG)/Cord 10 (SJTW 4/C)

K-L1430-25EX1 Gauge (AWG)/Cord

### **50 AMP. GENERATOR ADAPTOR CORD**

Nema 14-50P 120/240V plug to Nema 114-30R 120/240V twist lock receptacle
K-1450P-2 Female receptor with lighted and

Cord length: 1.5 feet

Gauge (AWG)/Cord: 10 (SJTW 4/C) \$69.99



12000W DUAL/FUEL GASOLINE/PROPANE GENERATOR

WITH ELECTRIC START

KCG-12001GE-DF

Powerful 18 HP

4 stroke air cooled moto

- AVR system and electronic ignition · Low oil shut-off with indicator light
- protects the engine
- Two duplex outlets: 120V/20 Amp. AC Twist lock outlet: 120V/240V/30 Amp. AC
- Outlet: 120V/240V/50 Amp. AC
- Keyed electric start and easy start
- AC double throw circuit breaker and resets



Comes with propane tank connection cable





\$2499.99

# METAL LATHES & ACCESSORIES

#### VARIABLE SPEED MINI METAL LATHE KC-0712ML

- 3/4" spindle bore
- Variable speeds 2 (0-1100, 0-2500 RPM)
- Comes complete with quick change gear box, face plate, steady rest, replacement gears, 4-way tool post, MT#2 dead center, threading dial indicator, - 3 jaw chuck, emergency stop button, chuck key and hex. keys

OPTIONAL CABINET

Θ

STAND SS-1022

S349.99

**BELT DRIVE METAL LATHE** 

KC-1022ML

• 1" spindle bore • Spindle speeds 6 (150-2400) RPM

 Comes complete with 5"-3 jaw chuck, 6-1/2"-4 jaw chuck, replacement gears, 4 way tool post, steady rest, follow rest, 8" face plate, thread chasing dial indicator, MT#3 dead center, full length splash guard, tool box, chuck key and hex. keys

#### GEARHEAD METAL LATHÉ

- 1 1/2" spindle bore
- Spindle speeds 9 (60-1500) RPM
  40(4-112 T.P.I) 30(.2 4.5mm) thread cutting

• 40(4-1121.F.I) 30(.2-4.3mm) Inread cuiling
• Comes complete with 6".3 jaw chuck, 8".4 jow chuck, imperial and metric gears, quick change tool post, steady rest, follow rest, 10" DI-4 camlock face plate, thread chasing dial indicator, MT#3 dead center, MT#3 arbor taper, 1/2" drill chuck, full length splash guard, tool box, chuck keys and hex. keys

WITH TAPER ATTACHMENT

KC-1236ML/SS-1236 KC-1236ML/KM-053/SS-1236

14" X 40"

(240V)



#### GEARHEAD METAL LATHE

- pindle speeds 8(70-2000 RPM)
- Spindle speeds 8(70-2000 RPM)
  34(4-56 T.P.I) 26(.4 7mm) thread cutting
  Comes complete with 6".3 jaw chuck, 8".4 jaw chuck, replacement gears, quick change tool post, steady rest, follow rest, 12" DI-4 camlock face plate, 2" Spindle Bore coolant system, full length splash guard, thread chasing dial indicator, 2 MT#3 dead centers, JT#5-MT#3 sleeve, chip tray, tool box, halogen lamp, chuck keys, hex. keys, and cabinet stand with foot brake

KC-1440ML-2

WITH TAPER ATTACHMEN KC-1440ML-2/KM-054

Θ

16" X 40"



#### **HIGH PRECISION** "TOOL ROOM" METAL LATHE

- Spindle speeds 16(45-1800 RPM)
- 2" spindle bore diameter
- 45(2-72 T.P.I) thread cutting
- Comes complete with 8"-3 jaw chuck with inside & outside jaws, 12"-4 jaw chuck, quick change tool post and two 3/4" tool holders, steady and follow rests with roller guides, 14" (D1-6) camlock face plate, MT #4 standard dead centre, MT #4 carbide tipped dead centre, MT #4 to MT #6 spindle sleeve adapter, halogen light, coolant system, full length splash guard, manual micrometer carriage

KC-1640ML

stop, tool box and wrenches





KING





## FAGOR DIGITAL READOUT SYSTEMS



20i-T-840 (Fits KC-1440ML-6 & KC-1440ML-2

2/AXIS with 8" x 40" scales **S2299**.

20i-T-1040 (Fits KC-1640ML)

2/AXIS with 10" x 40" scales

## **LIVE CENTERS**



KLC-3M TAPER SHANK - MT#3 Accurate

## **7 PC. DELUXE CUTTER** HOLDER SETS

- 2 positions carbide indexable
- Cutter Inserts (5pc.) • H.S.S. inserts (2pc.)
- Kit comes in a wooden



KC-0712ML, KC-1022ML

KC-1236ML, 14440ML-2 14440ML-6, KC-1640GH,

# TAPER ATTACHMENTS



These Taper Attachments are designed to fit our  $12^{''} \times 36^{''}$  ,  $14^{''} \times 40^{''} \& 16^{'''} \times 40^{''}$ Metal Lathes models KC-1236ML, KC-1440ML-2 & KC-1640ML

## PC. QUICK CHANGE TOOL POST KITS



KQCT-1015

Fits most lathes between 10" to 15" swing

KQCT-1318

Fits most lathes between 13" to 18" swing